




## ANYSHOP e2 Reliable, Stylish, Economic, Smartly Designed POS System

The stylish designed ANYSHOP e2 is intuitively designed so that anyone can install or replace its optional peripheral devices easily. For example, all peripheral devices are toolless designed, simply turn a thumb screw by hand to install or remove with minimal effort. The ANYSHOP e2 also boasts the ability for easy field servicing and upgrade due to its groundbreaking modular design that allows hassle free RAID upgrade and adding additional

side USB ports a breeze. The ANYSHOP e2 is also aesthetically pleasing due to multiple housing colors to choose from that will match just about any store's interior design. The ANYSHOP e2 POS system encompasses a user friendly advanced designed, extreme stability, and high performance with energy efficiency technology.

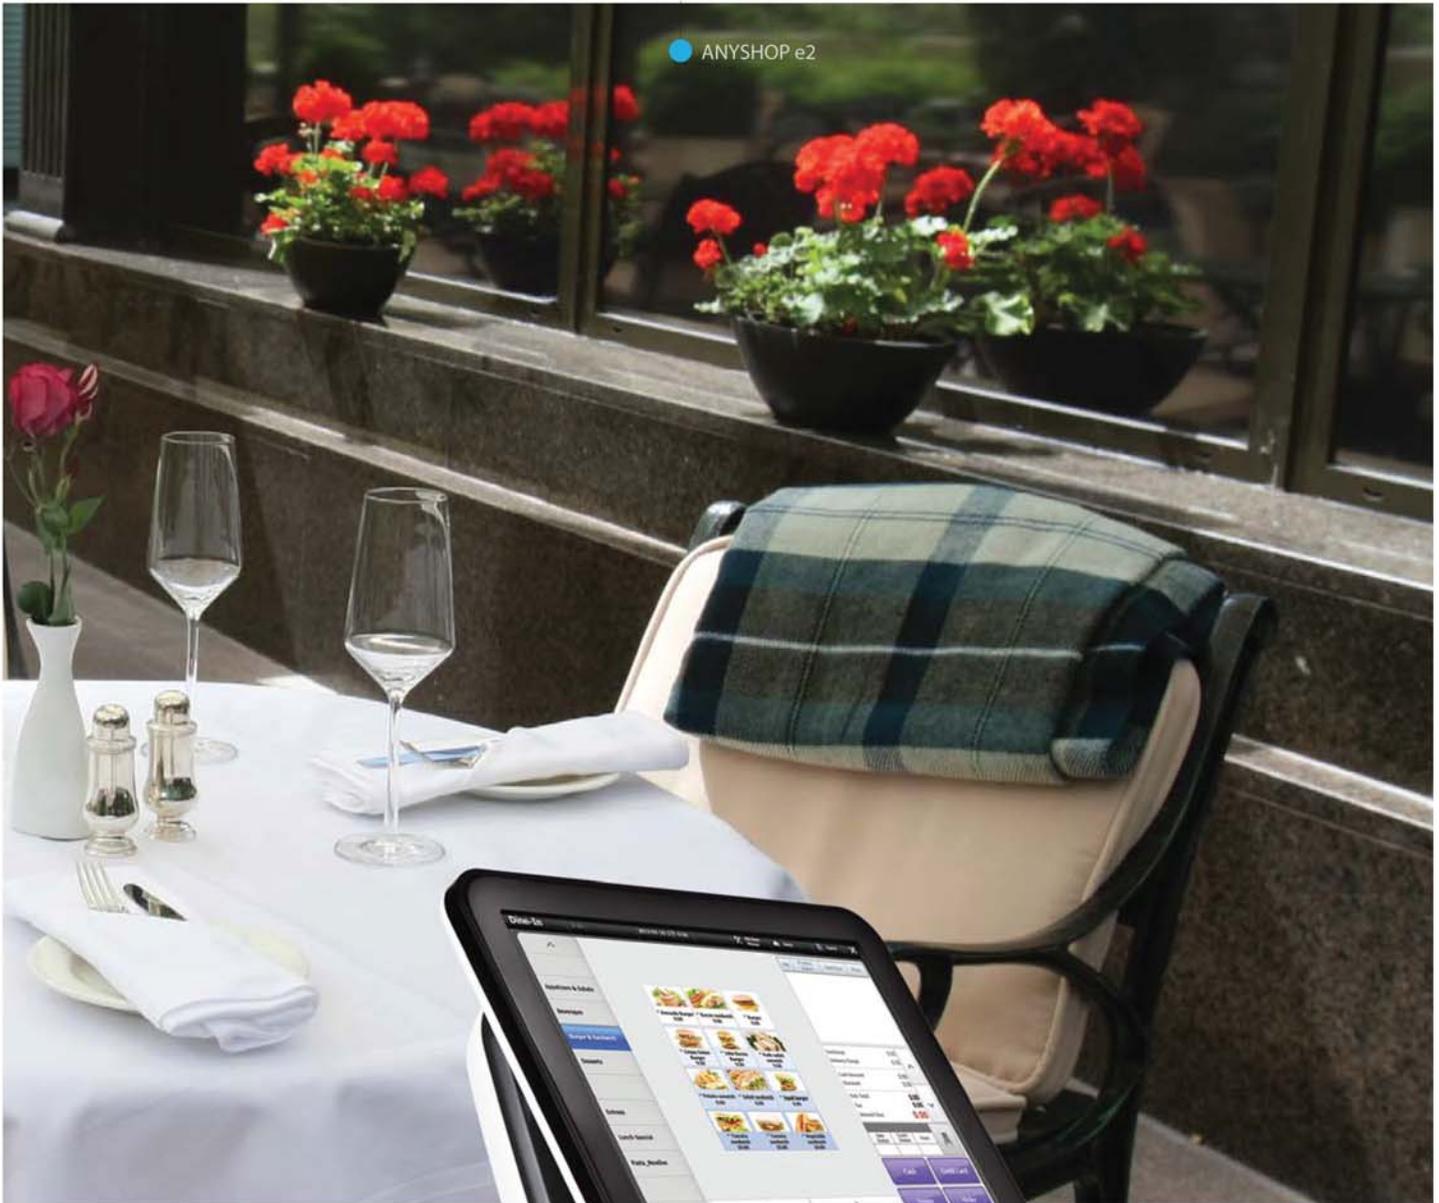

- Easy Installation and Maintenance
- Optional Color Case
- Optimized High Performance, Energy Efficient Processor
- Multiple I/O Ports
- Support Secondary HDD or SSD Drive.
- System Expandability
- Onboard UPS ('Smart Battery') Technology Guards Against Data Loss Due to Power Loss

# Options



## Color Case

- Monitor back case
- Terminal back case



## Magnetic Stripe Reader (MSR) Smart Card Reader (SCR)



## Easy Installation

- Easy Maintenance
- Reduces product maintenance cost



## Customer Display

- VFD type
- 20 columns x 2 lines



## 2nd LCD Display

- 12.1", 10.4", 10.1" display
- 1024 x 768 resolution



# Specifications



|                              | ANYSHOP e2 Q SERIES   | ANYSHOP e2 D25  |
|------------------------------|---|---|
| <b>CPU</b>                   | uPGA988 for 3rd Generation Intel® Core™ i7/i5/i3 (Ivy Bridge), 2nd Generation Intel® Core™ (Sandy Bridge) - Intel® Core™ i7 3940XM Processor (8M Cache, up to 3.90 GHz) | Intel Atom processor D2550 (1MB Cache, 1.86 GHz, Dual Core for Cedarview-D) |
| <b>Chipset</b>               | Intel QM77  | Intel NM10  |
| <b>Storage</b>               | SATA 3 (6Gb/s) 2.5 inch SSD 64GB (Max. 2 Optional)  | SATA 2 (3Gb/s) 2.5 inch SSD 32GB (Max. 2 Optional)                          |
|                              | Support Raid 0, 1   | -   |
|                              | Support AHCI  |   |
| <b>Memory</b>                | DDR3-1600MHz SODIMM Default 2GB (MAX. 8GB)  | DDR3-1066MHz SODIMM 2GB (MAX. 4GB)  |
| <b>Graphic</b>               | Integrated Intel GFX  | Integrated Intel GMA HD 3650  |
| <b>AMT</b>                   | Support iAMT 8.0  | -   |
| <b>Display</b>               |   |   |
| Resolution                   | 15" LED Backlight TFT-LCD 250 cd/m <sup>2</sup> (1024 x 768 resolution)   |   |
| Touch screen                 | 5-wired Resistive Touch (ELO Touch)   |   |
| <b>Internal I/O</b>          |   |   |
| USB                          | 3 Ports (reserved for touch controller, SCR EMV card, camera and MSR controller)  |   |
| Serial port                  | COM 5 (reserved for cash drawer port) & COM 6 (reserved for MSR)  |   |
| Display port                 | LVDS or VGA & COM 4 (reserved for CDP)  | VGA & COM 4 (reserved for CDP)  |
| Extension slot               | Mini PCIe   |   |
| Primary display              | 24bit LVDS  |   |
| <b>External I/O</b>          |   |   |
| USB                          | Rear 6 (USB 3.0 x 4 ports, USB 2.0 x 2 ports)   | Rear 4 (USB 2.0 x 4 ports)  |
| PS/2                         | 1 Port (reserved for Keyboard & Mouse)  |   |
| Serial port                  | COM 1 ~ 3 with 5V/12V power output on 9pin  |   |
| LAN                          | Gigabit Ethernet x 2 ports<br>1x Intel Gigabit LAN with iAMT 8.0 (Intel 82579LM)<br>1x Intel Gigabit LAN with (Intel 82583V)  | Realtek RTL 8111E Ethernet Controller                                       |
| Audio                        | Realtek ALC 892 / Line-out, Mic-in  |   |
| Display port                 | VGA x 1 port  |   |
| <b>Options</b>               |   |   |
| MSR                          | Comply with ISO 7811, Support 1 & 2 & 3 track   |   |
| Speaker                      | 2 x 0.8W (Stereo)   |   |
| Side USB                     | 4 Ports (USB 2.0 x 4 ports)   |   |
| SCR                          | EMV level 1   |   |
| Dallas                       | Dallas I-button reader  |   |
| Back up battery              | Smart battery (supports up to 1 packs)  |   |
| Customer display             | VFD type (20 x 2)   |   |
| 2nd LCD                      | 10.1" LCD or 10.4" LCD or 12.1" LCD (1024 x 768 resolution)   |   |
| 2nd Storage                  | 2nd 2.5 inch HDD / SSD storage  |   |
| Cash drawer port             | 1 Port  |   |
| Parallel port                | 1 Port  |   |
| WiFi                         | Mini PCIe for wireless LAN  |   |
| <b>Operating Temperature</b> | 0°C ~ 40°C at 10% ~ 80% humidity  |   |
| <b>Storage Temperature</b>   | -20°C ~ 60°C at 10% ~ 80% humidity  |   |
| <b>Qualification</b>         | CE, FCC, KC   |   |
| <b>Power</b>                 | Adaptor 24V, 6A   | Adaptor 12V, 5A   |
| <b>OS Support</b>            | Windows 7, Windows 8, POS Ready 7   | Windows XP/Vista, Windows 7, POS Ready 2009/7                               |
| <b>Dimension (WxHxD)</b>     | 365 x 305 x 385(mm), 14.3 x 12 x 15.1(inch)   |   |

\* Product specifications may differ according to region and may be changed without prior notice.